




Single-plunger pumps (PT 1.1 capacity up to 8 m³/h, pressure up to 40 MPa)

Three-plunger pumps (PT 1.3 and PT 2.3 capacity from 0.2 m³/h up to 60 m³/h, pressure up to 40 MPa) by API 674 (3rd edition)

Five-plunger pumps

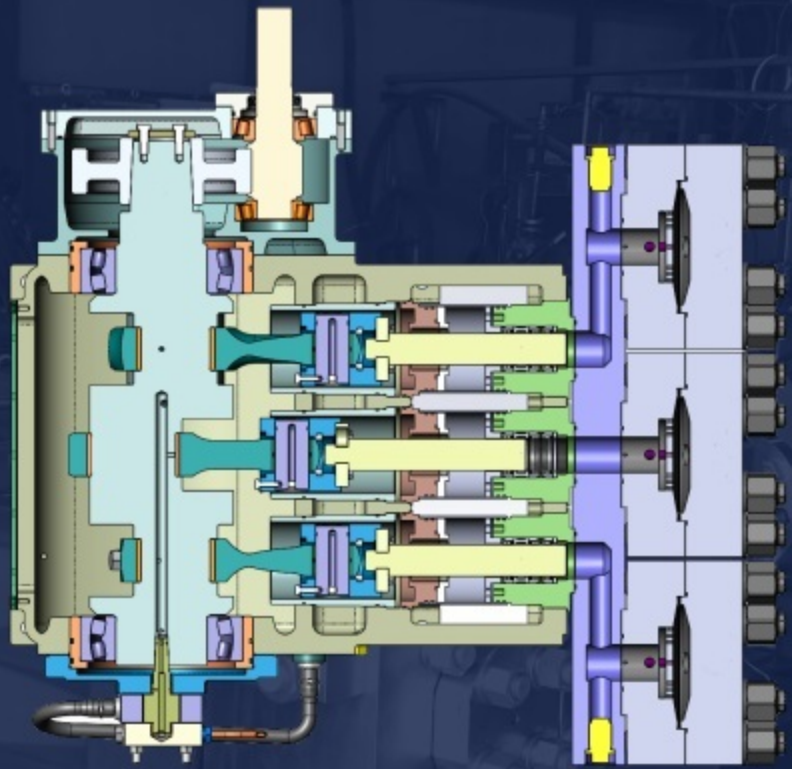

Our pumps designed for pumping various liquids, including chemically active, with temperatures from -15°C up to +450°C, kinematic viscosity not more than 8 cm²/s, with the contents of solid non-abrasive particles up to 0.2% by weight and by size up to 0.2 mm.

We configure our pumps and selecting materials of hydraulic part in accordance with the Customer requirements with attention to the operating mode to ensure trouble-free pumping operation during the entire service life.

Our pumps are certificated and have all the necessary permits (quality certificate, certificates of conformity TR TU 010, TR TU 012, API, ISO).

